

Mode Selective Photonic Lantern



Features

- Mode multiplexer
- Compact design
- Custom fiber design
- High quality mode excitation
- Low insertion loss

Product Overview

The Photonic Lantern offers a single component multiplexer/demultiplexer for mode division multiplexing using Few Mode Fibers (FMFs). Unlike alternative approaches the fiber lantern is fabricated in the same medium as the fiber transmission and offers optimum performance in a single component, compact format. Phoenix utilizes in-house proprietary technology to fabricate the lantern to offer the best performance.

Product Details

The all-fiber Lantern is an adiabatic taper that provides a low loss transition from the input fibers to the modes supported by the waveguide at its output. The mode selective lantern is a mode multiplexer that converts the input from a single mode fiber to a specific mode in the output few mode fiber.



Mode Selective Photonic Lantern

Technical Information

Phoenix optical specification is based on launching into commercially available FMF, which is aligned and attached prior to delivery.


3-port fiber lantern

| Parameter | | Specification |
|---|----|---------------------------|
| No. of input fibers | | 3 |
| Input fiber | | Corning SMF28 |
| Connectors | | Optional – please specify |
| Output fiber ¹ | | OFS two mode graded index |
| Fiber coating | | 245mm acrylate |
| Mode extinction | dB | >15 |
| Insertion loss fiber in to fiber out ² | dB | <2.5 (max) |
| Polarization dependent loss | dB | <0.5 (max) |
| Wavelength range | nm | 1450 - 1640 |

¹ Alternative FMF fiber can be offered

² Maximum across all fibers, excluding connectors – loss is fiber-in to fiber-out.

Packaging: Below is the component version. Also available in benchtop format. Please contact us for further information.

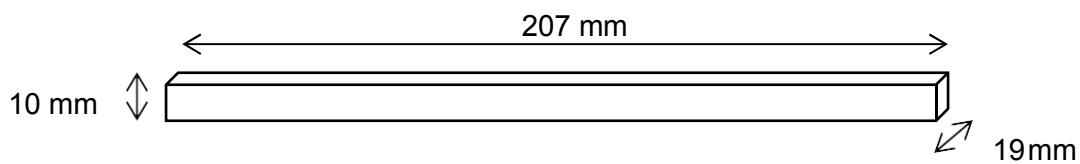

Order code:

| | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|--|---|--|---|---|---|---|---|---|---|---|---|---|--|
| 3 | P | L | S | - | | - | 1 | 5 | - | 1 | - | | - | | - | M | S | |
| | | | | | FMF: GI – Graded Index SI – Step index | | Wavelength: 15 – 1530nm 14 – 1480 nm 13 – 1300 nm | | | Cable type: 0 – none 1 – 900um jacket | | SMF Connectors: 0 – none 1 – FC/SPC 2 – FC/APC * Others available | | FMF Connectors: 0 – none 1 – FC/SPC 2 – FC/APC * Others available | | | | |